

Panel XS Reader

The Salto panel reader is a door entry system that works in conjunction with Salto controllers. Designed to be integrated behind lift panels, door intercoms, electric switches or turnstiles & gates. These models need a window, which is necessary for reader antenna operation.




Features

- Compact reader module reader.
- Specially designed to be integrated behind lifts panels, door intercoms, electric switches...
- Fully integrated with the Salto XS4 platform.
- Virtual network capable through Salto SVN data-oncard technology.
- Acoustic and optical signalling, dual colour green/red to indicate access authorisation.
- Reader is housed in one piece, weatherproof secure electronics potted enclosure.
- Two stickers & labels are available for visible signage.

Technical characteristics

- To be used in combination with controllers (CU42xxx) or Salto KS controllers (CU41xxx).
- Connection to the door controller: 4 wires.
- Designed to work with an online Salto SVN access control platform, with a stand-alone system or cloud-based Salto KS access control platform.
- Maximum distance between the door controller and the wall reader 400m1 using a twisted pair cable.

Technical drawing



Technology platforms



Salto Space



On-premise Network



Salto KS



Cloud application



Salto Homelok




Cloud application

Wireless technologies



Certifications

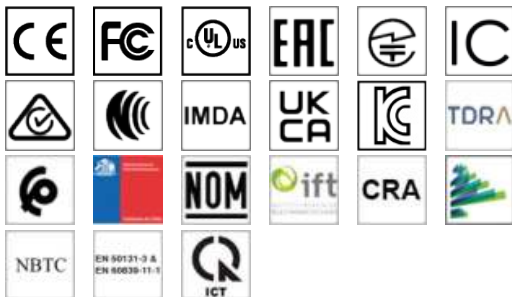

Carriers



Key Card

NXP MIFARE®



Key Fob

NXP MIFARE®



Digital Key

Bluetooth LE
NFC - Near Field Communication



Apple Wallet

Room keys in Apple Wallet

Disclaimer:

For a complete description of the product range, verification of the availability and technical feasibility of the selected product, and a commercial offer, please get in touch with the local authorized Salto dealer or a Salto office.

Salto reserves the right to modify the product and its components.

Technical information and images displayed on the Salto product page are for informative purposes only and designed to inform about the main product features, options and technical specifications. Therefore, all images, illustrations, shapes, features, specifications, sizes, data, descriptions and colours shown on the Salto Systems page shall consider as no-binding approximate indications only.

Part of the content of this document may have been generated or assisted by artificial intelligence tools. This document may also include automatic or manual translations provided exclusively for informational purposes, which may contain errors or inaccuracies. Salto does not guarantee the accuracy, quality, or reliability of such content or translations, including those generated by AI.

The User is responsible for verifying the information contained in this document and, in case of doubt, must refer to the original English version, which shall prevail in the event of any discrepancy. Other language versions are provided for informational purposes only.

Although Salto makes reasonable efforts to review the content of its downloadable documents, they may contain errors or omissions. Salto assumes no liability arising from the User's use, interpretation, or decisions made based on the information contained in this document, which is used at the User's sole responsibility.

For more detailed information on the use of artificial intelligence, translations, and applicable limitations of liability, please refer to the ["Terms of Use of our Website"](#).